
## Section H 'Nomic Station Assembly Manual Page A

## **Dual Hutch Shelf Assembly**

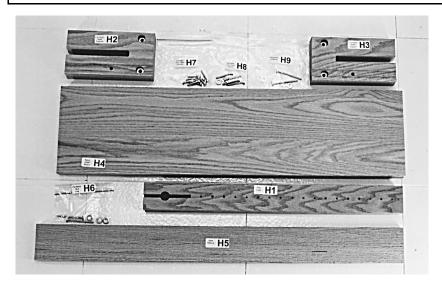


Locate the following parts:

- (2) pc H2 L. H. Hutch Shelf Supports
- (2) pc H3 R. H. Hutch Shelf Supports
- (2) pc H4 Hutch Shelf Boards
- (2) pc H5 Rear Stiffener
- (1) bag H7 hardware
- (1) bag H8 hardware
- (1) bag H9 hardware


Note: If you bought the Dual Hutch Shelf option with your desk, you will not get the (2) H1 Stub Legs or the (1) bag H6 hard-



This step for Hutch Shelf retrofit only

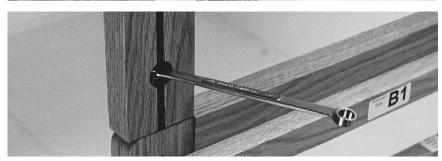

This step for Hutch Shelf retrofit only

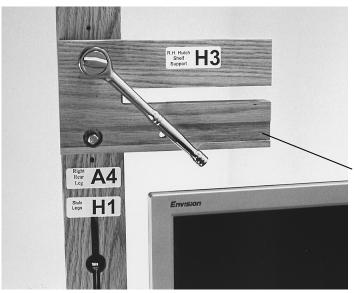

If you have not done so, adjust the height of your Monitor Shelf.

Install the H2 and H3 Hutch Shelf Supports onto the rear Legs of the desk. Use (8) short screws from the H7 bag, with no washer. Wax screws prior to insertion.

Make sure the slot in the Lower pair of Hutch Shelf Supports faces down and to the inside of the desk. The bottom edge of this shot should be higher than the top of your monitor, so that the Hutch Shelf Board will clear your monitor.

Wood Craft of Michigan Inc 224 North Main Street Eaton Rapids Michigan 48827 1-800-251-5195